

LED TECHNOLOGY

**50,000 Hours Life, 150/120/100 Watt,
120/277VAC 60Hz**

Applications:

High Bay, Low Bay Lighting

Features:

- Adjustable 150/120/100W LED
- Replaces a 500/400/350W HID or MH Unit
- Aluminum Body
- 90 Degree Beam Angle
- 3Ft Power Cord
- 0-10 Volt Dimmable (with motion sensor, sold separately)
- UL Listed
- Accessories Below Sold Separately

ADJUSTABLE WATT

150 WATTS	22,650 LUMENS
120 WATTS	18,120 LUMENS
100 WATTS	15,100 LUMENS




Accessories:

Battery Backup




Add model# when ordering

Screw on Motion Sensor



Add model# when ordering

Luminous Intensity Distribution Curve

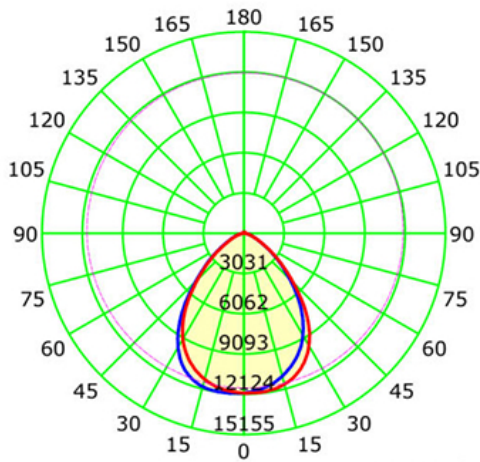

ADJUSTABLE LIGHT COLOR



Unit: cd
Average Diffuse Angle(50%): 83.6°

— C0-C180 — C90-C270 — G9



WARRANTY

* 5-YEAR

Weight: 4.5lb

Model:#	Description	wattage	lumens
HL150UF/CCT	150Watt UFO High Bay LED Fixture Black Body, Adjustable 3CCT	150/120/100W	22650/18120/15100

Wet Location Listed

* 5 Year Limited Warranty

UPC: 80680215594-4

Specification:

Input Line Voltage:	120-277VAC
Input Power	150/120/100W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-20°C/-4°F
Maximum Operating Temp	45°C/113°F
Adjustable CCT	3000K/4000K/5000K
CRI	≥80
Lumens	22650/18120/15100
CBCP	12124
Dimmable	10% 0~10V

1.0m	6051.57 / 12023.96lx	1.78m / 2.48sq.m
2.0m	1512.89 / 3005.99lx	3.55m / 9.91sq.m
3.0m	672.40 / 1336.00lx	5.33m / 22.29sq.m
4.0m	378.22 / 751.50lx	7.10m / 39.62sq.m
5.0m	242.06 / 480.96lx	8.88m / 61.91sq.m
6.0m	168.10 / 334.00lx	10.65m / 89.15sq.m
7.0m	123.50 / 245.39lx	12.43m / 121.34sq.m
8.0m	94.56 / 187.87lx	14.21m / 158.48sq.m
9.0m	74.71 / 148.44lx	15.98m / 200.58sq.m
10.0m	60.52 / 120.24lx	17.76m / 247.63sq.m

Height Avg./Nadir, E Beam Angle: 83.2° Diameter / Area

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.