

LED
TECHNOLOGY


50,000 Hours Life, 12 Watt & 16 Watt, 120VAC, 90CRI

Applications:


6" Recessed, Down Light with J-Box
Indoor And Outdoor Wet Locations Use

Features:


- Adjustable 5 Color 2700K, 3000K, 3500K, 4000K and 5000K
- Replace Incandescent Save 80% Energy (75 Watt Equivalent)
- Rated Life of 50,000 Hr
- Smooth Dimming to 10%
- Dims on Most Standard Household Dimmers
- IC Rated
- Flicker Free
- High Efficacy 90CRI True Color
- Knockout for Romex or Flex Connection



Luminous Intensity Distribution Curve

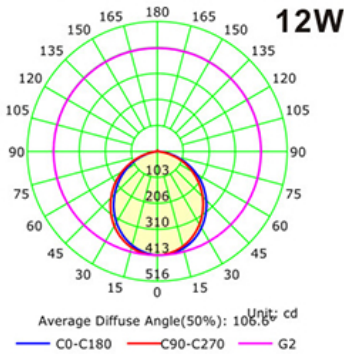


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

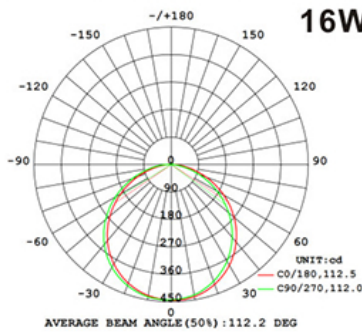


Specification:

Input Line Voltage:	120VAC
Input Power:	12W/16W
Input Line Frequency:	60Hz
Lamp Life (Rated):	50,000hrs
Minimum Starting Temp:	-20°C/-4°F
Maximum Operating Temp:	40°C/104°F
Adjustable CCT:	2700K/3000K/3500K/4000K/5000K
CRI:	≥90
Lumens:	950/1200
Beam Angle:	110°
CBCP:	413/445
Dimmable:	Standard Triac Dimmer


12W

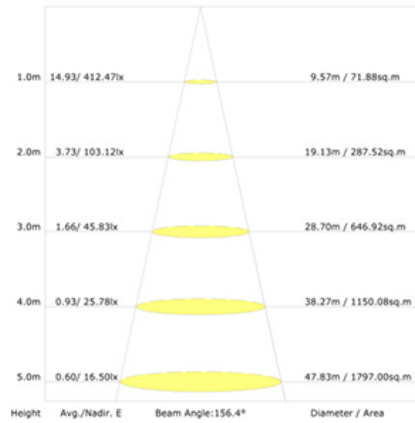

16W

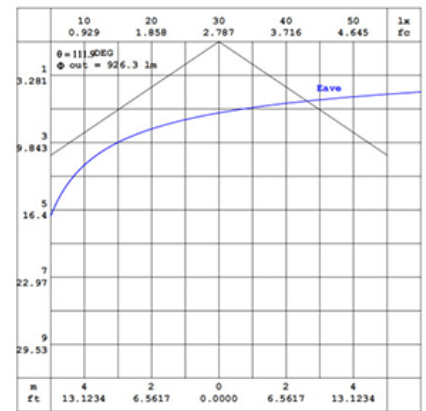

EASY INSTALLATION

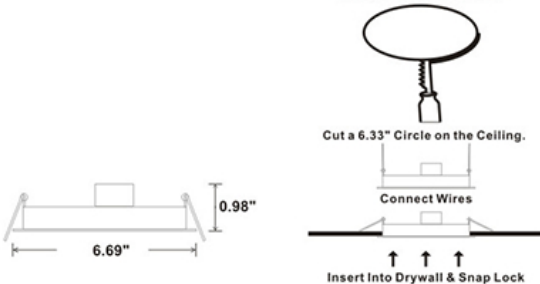

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

WARRANTY
2-YEAR*

Model:#	Description	wattage	lumens	Socket
LC12RT6-NCBX/CCT	6 Inch Dimmable, LED Can-Less Down Light With J-Box, SCCT	12W	950	N/A
LC12RT6-NCBX/CCT/4PK	6 Inch Dimmable, LED Can-Less Down Light With 4 Units & 4 J-Box, 5CCT	16W	1200	N/A

* 2 Year Limited Warranty Wet Locations Rated This Luminaire is JAB Compliant UPC LC12RT6-NCBX/CCT: 80680215607-1 LC12RT6-NCBX/CCT/4PK: 74616080091-2

